


# TK-1 Lock and Chain Kit Instructions

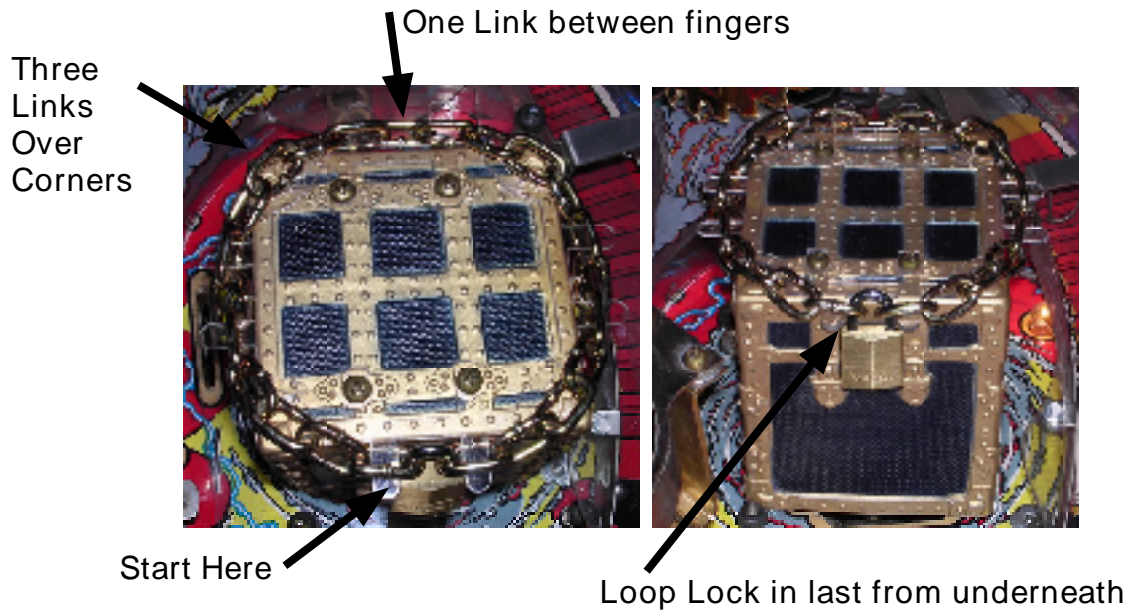

1. Operate your machine to orient the trunk in the normal position.
2. Turn off the machine and remove the cover glass.
3. Remove the four screws that hold the trunk in place.
4. Orient the plastic retainer with the pattern on the trunk. The screws are off-set to the right.
5. Align the mounting holes with the trunk screws and re-install.
6. Start with the front left finger and drape the chain as illustrated.
7. Add the lock by looping it through the loops from the bottom of one and then down the top of the other and lock it. It should hang freely.
8. Replace your cover glass.